

SEG

SP760 SMART POSITIONER



**Precision and reliable valve control with
Shinhwa Engineering.**



SP740



SP760



SP520

SEG SHINHWA ENG. CO., LTD.

FEATURES




- High reliability
- Explosion proof Housing (Zone 1 and Division 1 installation)
- Single or Double acting actuator
- Quick and easy operation
 - Auto calibration
 - Simple Initialization
 - Self diagnostic function
- LCD and 4 button local control
- Enclosure IP66
- Global approvals for explosion protection
Ex db IIC T5/T6 Gb, Ex tb IIIC T80°C Db (IECEX, ATEX, KOSHA, NEPSI)
- Vibration and impact resistance
- HART communication


Model	SP760S (Single)		SP760D (Double)	
	Linear	Rotary	Linear	Rotary
Input Signal	4~20mA DC			
Impedance	Max.450Ω @ 20mA DC			
Air Connection	PT 1/4, NPT 1/4			
Pres. Gauge Connection	PT 1/8, NPT 1/8			
Conduit Entry	PF(G) 1/2(Standard), NPT1/2(OPTION)			
Supply Pressure	0.14~0.7 MPa (1.4~7 bar)			
Explosion Proof Grade	Ex db IIC T5/T6, Ex tb IIIC (KCs) Ex db IIC T5/T6, Ex tb IIIC (IECEX) II 2G Ex db IIC T5/T6, II 2D Ex tb IIIC (ATEX) Ex d IIC T5/T6, Ex Td A21 IP66 (NEPSI)			
Enclosure	IP66			
Ambient Temperature	-30~80℃			
Linearity	±0.5% F.S.			
Hysteresis	±0.5% F.S.			
Sensitivity	±0.2% F.S.			
Repeatability	±0.3% F.S.			
Cam Characteristic	Linear(L), Square(S), Square root(R), User Set (16 Point)			
Humidity	5~95% RH at 40℃			
Communication(OPTION)	HART Communication			
Feedback Signal (OPTION)	4~20mA (DC 10~30V)			
Material	Aluminum Diecasting			
Weight	3.2 kg (7.1 lb)			

MODEL SELECTION


모델명	SP760	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
Acting Type	Single Double	S D							
Motion Type	Linear 20 ~ 80 mm	L1							
	80 ~ 160 mm	L2							
	Rotary Standard	R0							
	Fork Lever	R1							
	Namur	R2							
Feedback	None			0					
	Position transmitter(4 ~ 20 mA DC)			1					
Output safe Position	Fail safe				1				
	Fail Lock				*				
Explosion Protection	None Explosion proof(IP66)					0			
	Explosion proof (Ex db IIC T5/T6 Gb)		(KCs)			1			
	(Ex tb IIIC T80°C Db)		(IECEX)			2			
			(ATEX)			3			
			(NEPSI)			4			
Connection	Air – PT1/4", Conduit – G(PF)1/2" Air – NPT1/4", Conduit – NPT1/2"						G N		
Position L/S	None							0	
	2×SPDT							1	
Option	None								0
	HART communication								H

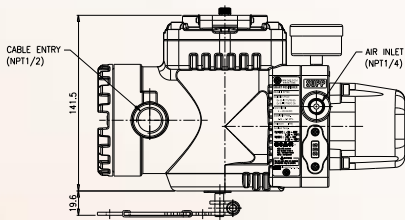

LEVER TYPE



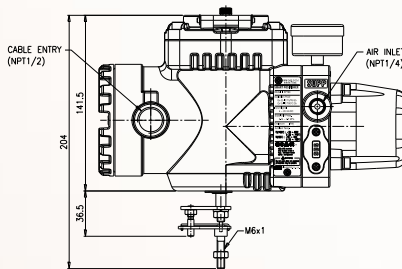


FORK LEVER TYPE

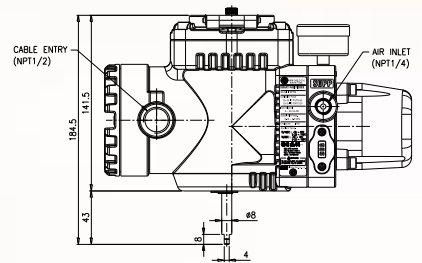

NAMUR TYPE

DIMENSIONS

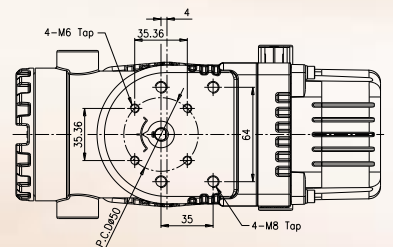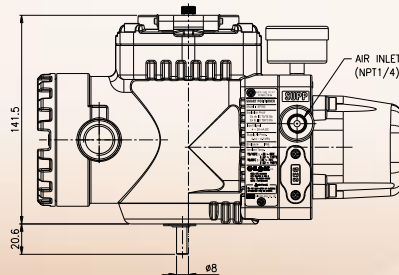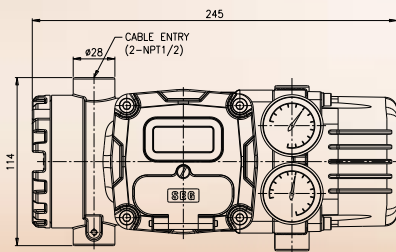



Production item

- ◆ **Motor Cylinder**
- ◆ **Electrical Actuator**
- ◆ **Pneumatic Actuator**
- ◆ **Smart Positioner**



Version : SEG_EN_02/2020



SHINHWA ENG. CO., LTD.

242, CHEONGNEUNG-DAERO, NANDONG-GU,
INCHEON-CITY KOREA
TEL +82-32-817-8030
FAX +82-32-815-8036
Web <http://www.seg.co.kr>
E-mail 8030@seg.co.kr

We reserve the right to make technical
changes or modify
the contents of this document without prior
notice

Copyright © 2020 SEG
All rights reserved.
Printed in Korea

NO. 2019-03